


# Flyer12



- ▶ Light weight frame
- ▶ Quick and easy to assemble
- ▶ Wide viewing angle
- ▶ Thin tube to light 40% transparent
- ▶ Large scale LED graphic display
- ▶ All heat sink design, with good heat dissipation

Specifications	
LED source:	SMD LED (3in1)
Pixel pitch :	12 mm
Pixel configuration:	1 LED/pixel
Intensity:	5,500 cd/m <sup>2</sup>
Viewing angle:	140° H/V
Panel weight:	8.6 kg
Panel resolution:	48 x48 pixels
Dimensions:	576x576x154mm
Pixel resolution:	6,944 pixels
Colours:	68,719 millions
Brightness:	5,000 nits
Power supply:	AC 90V-260V
Display refresh rate:	>1,000 Hz
Video frame rate:	60 Hz
Power consumption (max.):	300 watt
Communication mode:	RS232
Data transmitting mode:	Coaxial cable (1 BNC in , 2 BNC out)
Driving method:	Static
Panel material:	Aluminum
Ingress protection:	IP65
Operation temperature:	-20°C~+50°C
Operation humidity:	10%~95%
Lifetime:	>80,000 hours

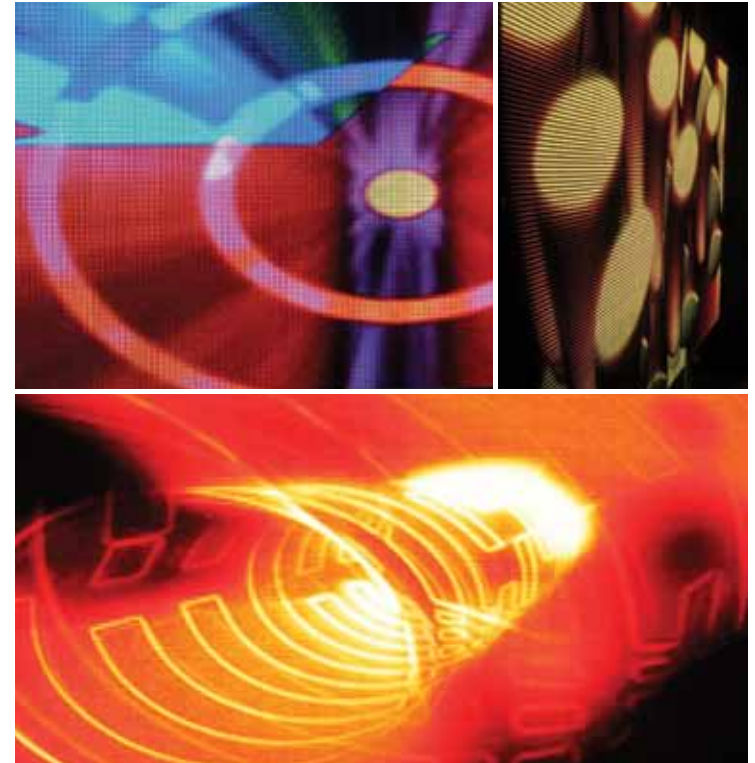

✦ If you require any further information about this product please contact:

**Mark Gent**

tel: 07825 041825

email: mark.gent@mediatecgroup.com

**Mike Bone**

tel: 07766 687363

email: mike.bone@mediatecgroup.com